

# Filling valves

## Filling module 537 EA



Filling valve for heating systems.

Max pressure: 1.0 MPa  
Max working temp: 90 °C

## Design

Valve body made in DZR-brass, EN 12165 CW602N, with straight flow. The valve has an integrated shut-off and check valve, which also ensures opening under low pressure differentials.

Backflow protection type EA complying with EN1717. Pipe connections with G $\frac{3}{4}$  male thread.


## Fitting / Installation

The arrow on the valve housing indicates the direction of the flow.

Pipe connections with G $\frac{3}{4}$  male thread. The thread has to be sealed in the usual manner. Alternatively, a G $\frac{3}{4}$  flat union with captive nut and flat gasket.

## Operation and maintenance

The filling valve requires no maintenance.  
The installation should be checked regularly.

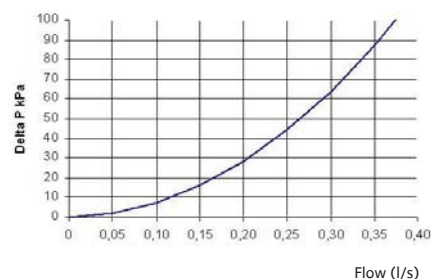

Article	Dimension	Art. no	Pack qty
537 EA-G20/G20	G $\frac{3}{4}$ /G $\frac{3}{4}$ male	091122	1